



Please read this installation manual completely before installing the product. Installation work must be performed in accordance with the national wiring standards by authorized personnel only.

Please retain this installation manual for future reference after reading it thoroughly.

THERMAV


(Sanitary Water Tank Kit)

PHLTB



www.lg.com

Connecting Sanitary Water Tank

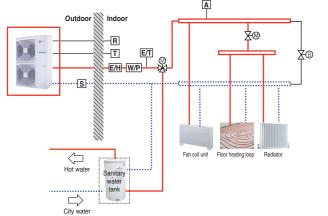



· Sanitary water tank

- It should be equipped with internal electric heater to generate sufficient heat energy in very cold

- Refer to the installation manual of **THERMAV**. to install the 3way valve.

THERMAV supports following 3way valve

		• •	
Type	Power	Operating Mode	Supported
SPDT 3-wire	1~ 230 V	Selecting "Flow A" between "Flow A" and "Flow B" (2)	Yes
(1)		Selecting "Flow B" between "Flow A" and "Flow B" (3)	Yes

- (1): SPDT = Single Pole Double Throw. Three wires consist of Live1 (for selecting Flow A), Live 2 (for selecting Flow B), and Neutral (for common).
- (2): Flow A means 'water flow from the unit to under floor water circuit.'
- (3): Flow B means 'water flow from the unit to sanitary water tank.

Safety Precautions

- To prevent injury to the user or other people and property damage, the following instructions must be followed
- Be sure to observe the cautions specified here as they include important items related to safety.
- Incorrect operation due to ignoring instruction will cause harm or damage. The seriousness is classified by the following indications.

AWARNING This symbol indicates the possibility of death or serious injury.

ACAUTION This symbol indicates the possibility of injury or damage to properties only.

▲WARNING

a dedicated circuit. There is risk of fire or electric shock.

There is risk of fire or electric shock.

· There is risk of fire or electric shock.

. Almost the antifreeze is a toxic product

For electrical work, contact the dealer, seller, a qualified electrician or an Authorized Service Center.

Always ground the unit.

Install the panel and the cover

Always install a dedicated circuit and breaker.

. There is risk of fire or electric shock.

· There is risk of fire or electric shock Use the correctly rated breaker

Improper wiring or installation may · There is risk of fire or electric cause fire or electric shock

Do not modify or extend the

explosion, or injury.

· There is risk of fire, electric shock, · Sharp edges could cause injury. Especially careful on the unit edges and the fins on the heat exchanger

For antifreeze, always contact the dealer or an authorized service center.

Be sure the installation area does not If the base collapses, the unit could fall with it, causing

For installation, always contact the dealer or an

property damage, unit failure, and personal injury. Do not install the unit on a defective installation

There is risk of fire, electric shock, explosion, or injury.

. It may cause injury, accident, or damage to the unit

ACAUTION

To avoid vibration or water leakage


Avoid personal injury

▲ WARNING

Installing recirculation pump

When THERMAV is used with sanitary water tank, it is STRONGLY recommended to install recirculation pump to prevent flooding out cold water at the end of hot water supply and to stabilize the water temperature inside the sanitary water tank.

- The recirculation pump should be operated when sanitary water demand is not required. Therefore, external time scheduler to determine when the recirculation pump should turn on and turn off is required.
- The operating duration time of the recirculation pump is calculated as follow :
- Duration time [minute] = $(k^*V)/R$
- k: 1.2 ~ 1.5 is recommended. (If distance between pump and tank is far, then choose high number.)
- V: Volume of sanitary water tank [liter]
- R: Water flow rate of pump [liter per minute], which is determined by pump performance curve.
- The pump operating start time should be prior to the sanitary water demand.

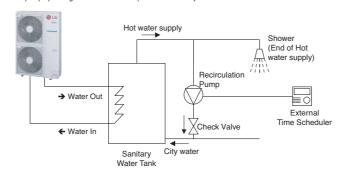

How to Wire Sanitary Water Tank Heater

Step 1. Uncover heater cover of the sanitary water tank. Heater is located inside of the tank

Step 2. Find terminal block in the water tank kit and connect wires as below. Wires are field-supplied item

- (L): Live signal from Water Tank Kit to Heater
- (N): Neutral signal from Water Tank Kit to Heater

▲ WARNING

- Wire specification
- Cross-sectional area of the wire should be over 5mm².
- You should use the shield wire for the signal wire in terminal block 5,6 not

to make the electric noise. Adjusting thermostat temperature

• To guarantee proper operation, it is recommended to set temperature of thermostat to maximum temperature (symbol (A) at the figure 3).



DIP Switch Setting

Field Wiring

Factory Wiring

▲ CAUTION

Parts

1 Sensor (Thermistor)

3 Installation Manual

4 Multi harness (only AHBWXXXA0 model use)

MCCB

2

Magnetic switch

contact

2 Water tank kit

•

Wiring Diagram

WIRING DIAGRAM

(3)

2 4

BR A1 A2 BL

(L3)

(T3)

BL

POWER SUPPLY

1~ 220-240 V 50 Hz (Use same dedicated

power source which is applied to AWHP unit)


(L1)

(T1)

Turn off electric power supply before setting DIP switch.

Whenever adjusting DIP switch, turn off electric power supply to avoid electric shock.

General Information

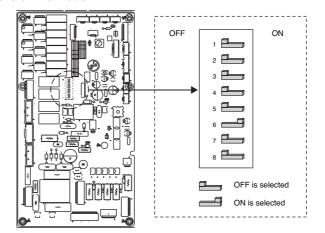

Description	Setting	Default
	2 Unit only	
Accessory installation information.	2 Unit + Sanitary water tank is installed.	2 3
	2 Unit + Sanitary water tank + Solar thermal system is installed.	

Installation Method

To establish sanitary water circuit, 3way valve and sanitary water tank kit is required

How to Install Sanitary Water Tank Kit

Follow below procedures Step 1 ~ Step 5.

3

Terminal

RD

AWHP unit

MEZ63128801

1(L) 2(N) 3(L) 4(N) 5 6

-W--

water tank)

HEATER COIL (Only available when

heater is installed in

Block 3

Step 1. Uncover the water tank kit and locate it on the wall.

Step 2. Connect the water tank kit to the main power like the below figure 2.


Step 3. Connect the water tank kit to the Main PCB Assembly1 like the below figure 2.

Step 4. Connect power cord of sanitary tank heater. It is located inside of the tank. Refer to the next page for more information.

Step 5. Find sanitary water tank sensor. Plug it to 'CN_TH4' (Red Connector) of the main PCB assembly 1. The sensor should be mounted correctly to the sensor hole of sanitary water tank. Like below figure. 1

Step 6. Connect the Main PCB to terminal block with wire(Part 4) like figure 3.

* This wire is only for AHBWXXXA0 model.

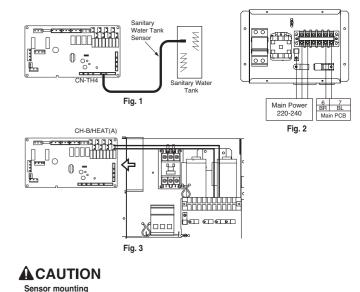

Insert sensor into sensor socket and bolt it tightly