

NEOSTAR

2P60 Mono-Glass Module

500W-525W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



red dot winner 2023



Product
Warranty
Extendable to 25years*



Performance
Warranty



Warranty partner

Munich RE





525W
Output

23.7%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

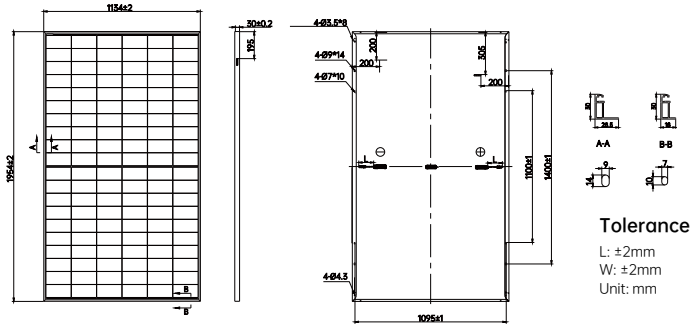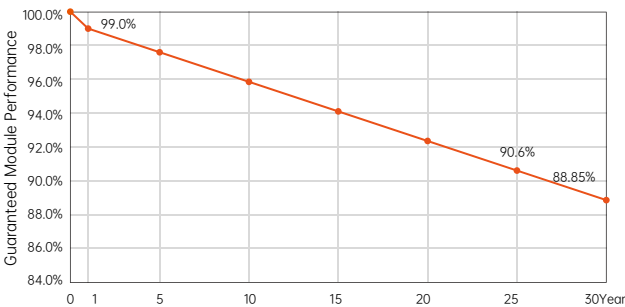

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)												Power Tolerance:0~ + 3%	
Module Type	AIKO-A500-MAH60Mw		AIKO-A505-MAH60Mw		AIKO-A510-MAH60Mw		AIKO-A515-MAH60Mw		AIKO-A520-MAH60Mw		AIKO-A525-MAH60Mw		
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
Pmax [W]	500	379	505	383	510	386	515	390	520	394	525	398	
Voc [V]	45.02	42.71	45.12	42.80	45.22	42.90	45.32	42.99	45.42	43.09	45.52	43.18	
Vmp [V]	37.90	35.96	38.00	36.05	38.10	36.15	38.20	36.24	38.30	36.34	38.40	36.43	
Isc [A]	14.05	11.35	14.11	11.40	14.17	11.45	14.23	11.49	14.29	11.54	14.35	11.59	
Imp [A]	13.20	10.55	13.30	10.63	13.39	10.70	13.49	10.78	13.58	10.86	13.68	10.93	
Module Efficiency	22.6%		22.8%		23.0%		23.2%		23.5%		23.7%		

Product Specification

Cell Type	N-Type ABC
Glass	3.2 mm tempered glass
Backsheet	High weather resistant backsheet
Frame	Black Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ±1200mm
No. of Cells	120(6*20)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4
Weight	23.1kg±3%
Dimension	1954*1134*30mm
Package Detail	37pcs per pallet / 185pcs per 20'GP / 888pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	40 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
*Optional Munich Re coverage is available upon request
V5.1_202505_DsDr_EN